



Order Information										
FTP Network Cable	Barcode	Color	Conductor	Conductor Diameter	Transmission Speed	Bandwidth	Inner Jacket	Outer Jacket	Test Standard	Tester
Cat6 FTP	6935089115977	Gray	OFC ≥99.95%	0.58mm ±0.01mm	1Gbps	250MHz	Eco-PE	Eco-Friendly Matte PVC	90m Link	FLUKE 5000

■ Cable Conductor Diameter Within Positive Tolerance; ■ Length 305M/Roll, Tolerance Range: ± 30cm; ■ For Other Materials, Specs, Weight, Contact Customer Service.


六类FTP单层屏蔽高纯度无氧铜网线 CAT6 FTP 4-PR HIGH-PURITY OXYGEN-FREE COPPER NETWORK CABLE



Cat 6 FTP Single Shielded Network Cable- Gray



Shielded Shell Material Enhances RJ45 Crimping Performance

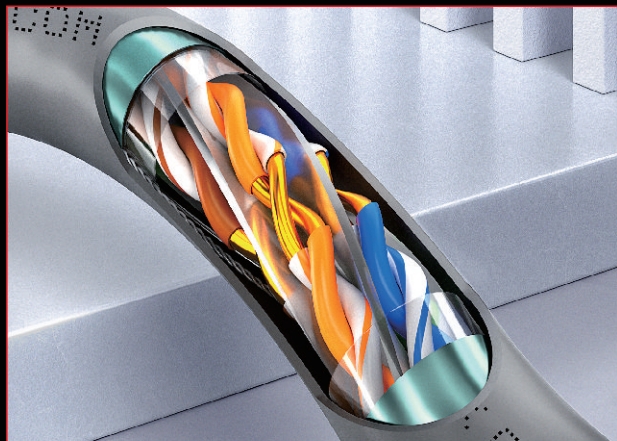

Twisted Processing and Foil Shielding Ensure Compliance



Eco-PE Jacket with Oxygen-Free Copper FLUKE-5000 Tested



1Gbps Speed Supports POE+ With Ethernet Connectivity



250M Bandwidth Ensures Stable High-Speed Transmission

Product Description			
Cable Type	CAT6	ShieldingType	FTP
Transmission Rate	1Gbps	Bandwidth	250MHz
Bend Radius	21.6D	Max Installation Tensile Strength	≤110N
OperationTemperature	-20~60°C(-4~140°F)	Install Temperature	-10~50°C(-14~122°F)
RoHS Compliance	Compliant	CompliantStandards	YD/T1019-2023

For more product information, please contact: service@ampcom.com