


SC-SC单模多模光纤跳线


SC-SC SINGLE-MODE AND MULTIMODE FIBER OPTIC PATCH CORD




Fiber end-to-end subsystem connections in industrial parks and public areas.

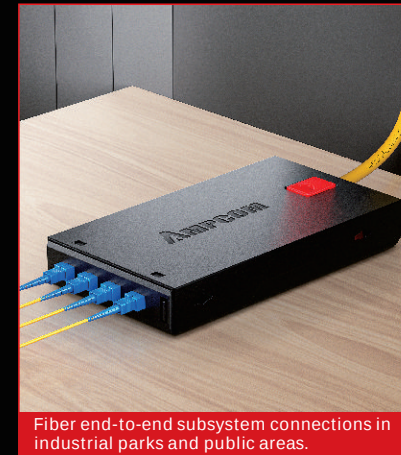


LSZH outer jacket and precision zirconia ferrule ensure low insertion loss.

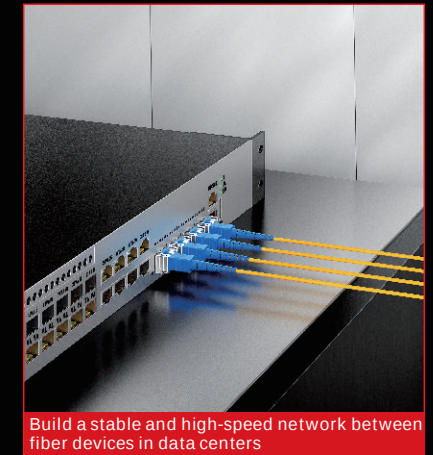


Build a stable and high-speed network between fiber devices in data centers

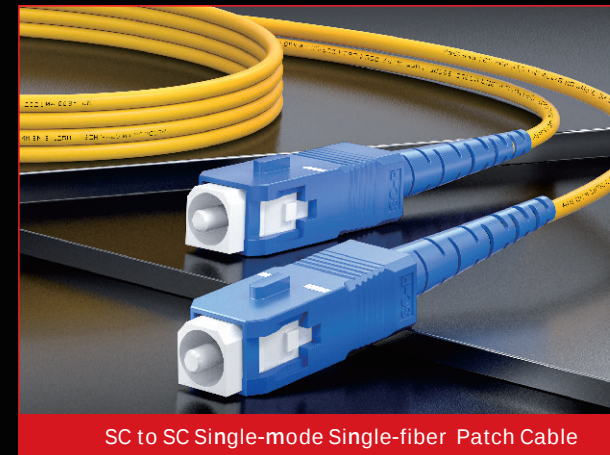


SC to SC Single-mode Single-fiber Patch Cable

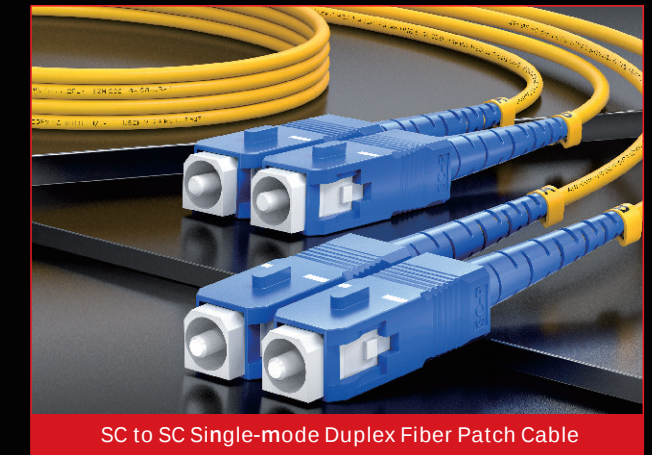

SC to SC Single-mode Duplex Fiber Patch Cable

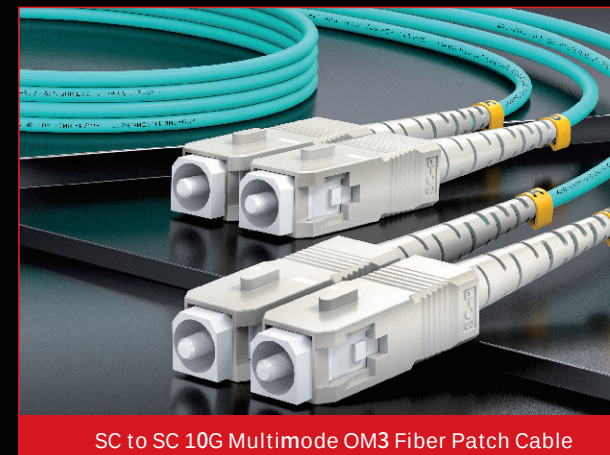

SC to SC 10G Multimode OM3 Fiber Patch Cable

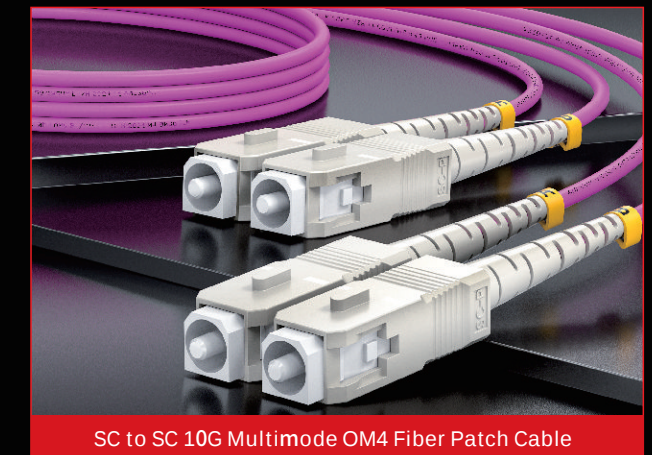

SC to SC 10G Multimode OM4 Fiber Patch Cable

Product Description

Connector Type	SC-SC	Fiber Outer Diameter	2.0mm/3.0mm Customizable
Aramid Yarn	Import	Polishing Type	UPC/APC Optional
Minimum Core Bend Radius	7.5mm	Patch Cord Minimum Bend Radius	20/10D (Dynamic / Static)
Multimode Attenuation @ 850 nm	0.30dB/KM	Single-mode Attenuation @ 1310 nm	0.36dB/KM
Multimode Attenuation @ 1300 nm	1.0dB/KM	Single-mode Attenuation @ 1550 nm	0.22dB/KM
Connector Durability	≥1000次	Operating Temperature	-20~70°C (-4~158°F)
RoHS Compliance	Compliant	Applicable Standards	YD/T1258.2-2009

Ordering Information

Ordering Information											
Product Name	Type	Length	Fiber Count	Color	Code	Fiber Grade	Jacket Material	Wavelength	Insertion Loss	Return Loss	
SC-SC Fiber Patch Cable	Single-mode	3 meters	Single-fiber	Yellow	6935089131625	Grade A	LSZH	1310/ 1550nm	≤0.2dB	≥50dB	
	Duplex		6935089182733								
	10G Multimode OM3		Duplex	Sky Blue	6935089127567			850/ 1300nm		≥20dB	
	10G Multimode OM4		Duplex	Magenta	6935089127949						

■ Our company supports SC LC FC and ST connector types. Customizable fiber patch cable lengths for single-mode multimode and 10G OM3 OM4 OM5 fibers ; ■ Custom products are shipped within 24 to 48 hours.