

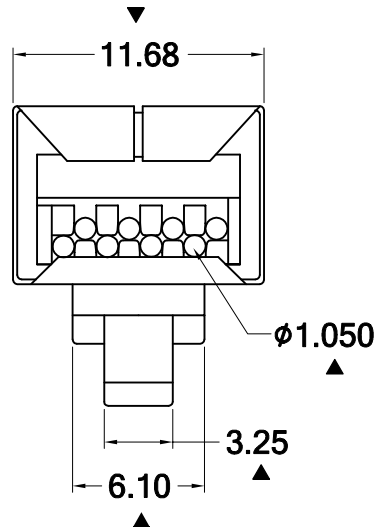
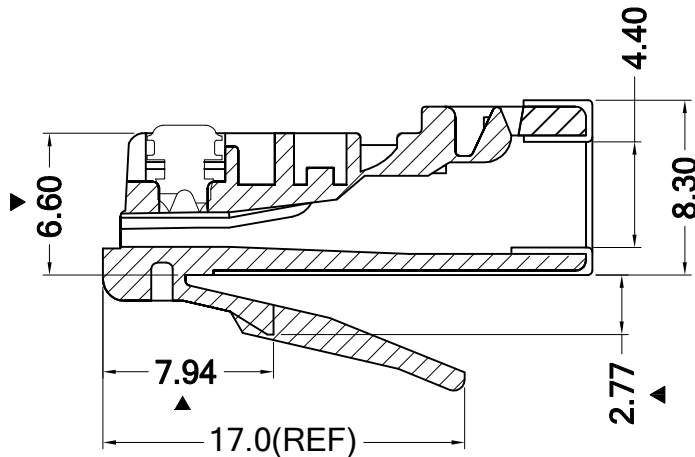
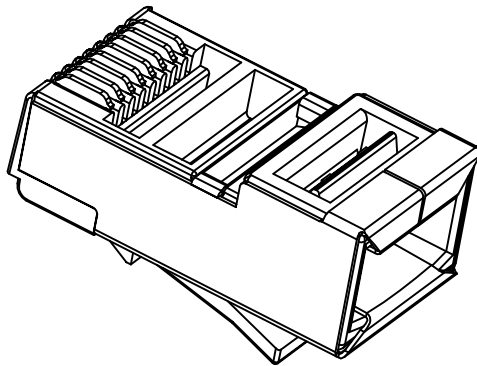



成品图

注:带 ▲ 为需管控尺寸

REV.	ECN NO.	DATE

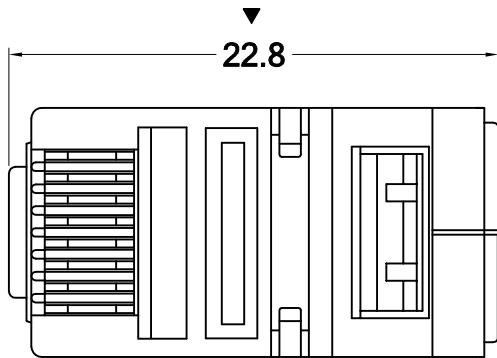


A : stranded wire



H : solid wire

ORDER INFORMATION:

S7811TF888

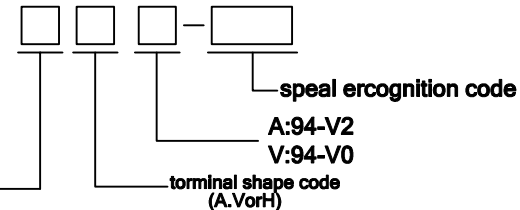

SPECIFICATION NOTES:

1. Electrical:

- 1.1 Voltage rating: 125 VAC RMS
- 1.2 Current rating: 1.5 A
- 1.3 Contact resistance: 50 milliohms max
- 1.4 Insulation resistance: 1000 megaohms min @ 500 VDC
- 1.5 Dielectric strength: 1000 VAC RMS 50Hz, 1MIN.

2. Mechanical:

- 2.1 Retention strength: 50N MIN FOR 60S±5S
- 2.2 Operating life: 750 CYCLES MIN
- 2.3 Insertion force: 30N MAX.

3. Material & finish:

- 3.1 Housing: PC clear
- 3.2 Contact: copper alloy plated with gold
- 3.3 Operating temperature: -40 °C to +80 °C.

未注公差 (mm)		安普康科技集团 (香港) 有限公司				TITEL 品名	PLUG	
X	±0.30					PART NO. 料号	S7811TF888XXA穿孔式	
.X	±0.20	核 准	审 查	绘 图	HU	DATE 日期	2020/08/24	
.XX	±0.15					SCALE 比例	1:1	VIEW 视角
.XXX	±0.05					REV 版本	A.0	
	±2.0							