



Order Information										
UTP Network Cable	Barcode	Color	Conductor	Conductor Diameter	Transmission Speed	Bandwidth	Inner Jacket	Outer Jacket	Test Standard	Tester
LSZH CAT6 UTP	6935089135623	Blue	OFC ≥99.95%	0.57mm ±0.02mm	1,000 Mbps	250MHz	Eco-PE	LSZH	90m Link	FLUKE -5000

■ Cable Conductor Diameter Within Positive Tolerance, ■ Length 305M/Roll, Tolerance Range: ±30cm, ■ For Other Materials, Specs, Weight, Contact Customer Service.


六类UTP非屏蔽高纯度低烟无卤无氧铜网线 CAT6 UTP 4-PR LSZH HIGH-PURITY OXYGEN-FREE COPPER NETWORK CABLE




Cat6 Unshielded Low Smoke Halogen-Free Network Cable




Suitable for termination with various RJ45 connectors or network modules

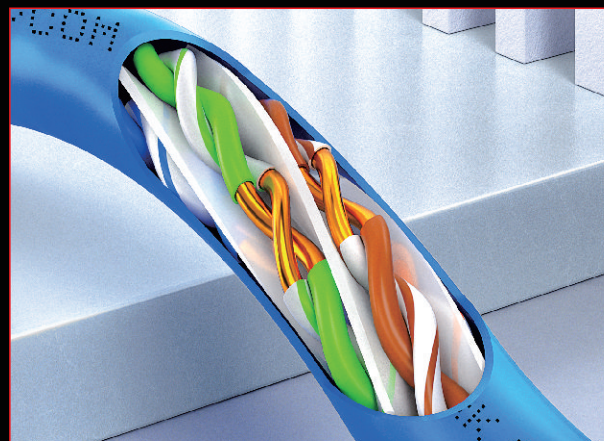

High-purity oxygen-free copper conductors, easily passing FLUKE-5000 link certification tests

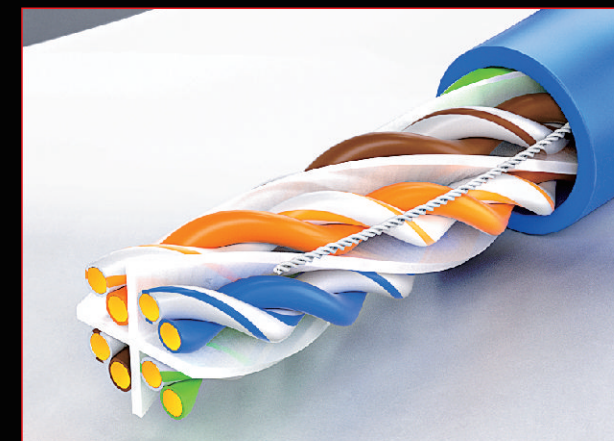

Twisted pair construction compliant with integrated cabling standards

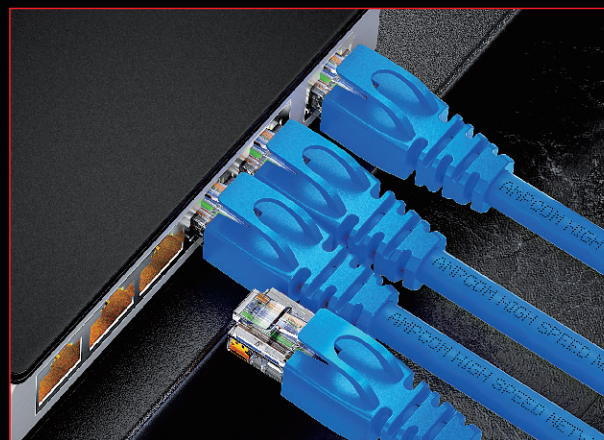

Supports 1Gbps data transmission with POE+ power delivery



250MHz bandwidth enables end-to-end system data deployment

Product Description			
Cable Type	CAT6	ShieldingType	UTP
Transmission Rate	1,000 Mbps	Bandwidth	250MHz
Bend Radius	26D	Max Installation Tensile Strength	≤110N
OperationTemperature	-20~60°C (-4~140°F)	Install Temperature	-10~50°C (-14~122°F)
RoHS Compliance	Compliant	CompliantStandards	YD/T1019-2023

For more product information, please contact: service@ampcom.com