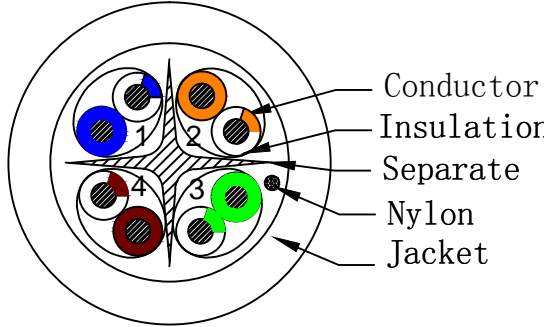


SPECIFICATION/规格书

CONSTRUCTION & DIMENSION/结构 & 尺寸				Insulation Color /绝缘颜色:	
Conductor/导体	Material/材质 : Bare copper Solid (无氧铜) Size/规格 : 24AWG*4P Construction/结构: 1/0.48MM足				
Insulation/绝缘	Material/材质 : HD-PE	CROSS-SECTION/截面图 ELECTRICAL PROPERTIES/电气特性			
	Avg. Thickness : 0.20MM				
	Min. Thickness : 0.19MM				
	Diameter/外径 : 0.88±0.03MM				
Inner Layer/芯线对绞	Direction/绞向 : S	Solid conductor resistance/单条导体电 : ≤9.7Ω/100M at 20℃ Insulation Resistance/绝缘电阻 : Min. 5000mega ohms-km at 20℃ Dielectric Test/耐电压 : 1000V DC/1min; No Breakdown Delay skew/延迟差异 : ≤45nS Propagation speed/速率 : NVP 69% Frequency/频率 : 250Mhz Impedance/阻抗 : 100Ω ±15			
	Pitch/绞距REF : 25mm underneath				
Outside Layer/成缆	Direction/绞向 : S	DESCRIPTION/说明 Rating Temperature/额定温度 : 60℃ Voltage Rating/额定电压 : 30V Standard /标准 : TIA/EIA-568B. 2			
	Pitch/绞距REF : 100mm underneath				
Separate/隔离	Material/材质 : Polyethylene	Notes: Cable jacket has ribbed texture.			
	Construction/结构: 4.3×4.3×0.45mm				
Shielding/屏蔽	Material/材质 : /	Description: LAN CABLE CAT6 UTP 0.48BC 4P PVC Customer : Drawing NO. : N20200515001			
	Coverage/遮蔽率 : /				
	Drain Wire/地线 : /				
	Material/材质 : /				
Filler/填充	Material/材质 : Nylon	Drawing Yang 2020. 5. 15 UNIT:MM REV. :A PART NO. :			
	Coverage/遮蔽率 : /				
Jacket/护套	Material : 75度45P PVC	Checked			
	Avg. Thickness : 0.60MM				
	Min. Thickness : 0.55MM				
	Diameter : 6.1±0.20mm				
Marking/印字	Color : Blue PVC	Approved			
	AMPCOM HIGH SPEED NETWORK CABLE 4-PR/23AWG UTP CAT6 AMPC6048BL YD/T1019-2023 -20-60℃ 米数 日期 (年月)				
Packing/包装	305 Meter Cardboard Packaging	安普康科技集团 (香港) 有限公司 AMPCOM TECHNOLOGA GROUP (HONGKONG) CO., LIMITED			