

超六类S/FTP双屏蔽高纯度无氧铜网线
CAT6A S/FTP 4-PR HIGH-PURITY OXYGEN-FREE COPPER NETWORK CABLE




Cat6a S/FTP Ethernet Cable-Gray



Cat6a S/FTP Ethernet Cable-Red



Precision manufactured with PE insulation via physical foaming process.

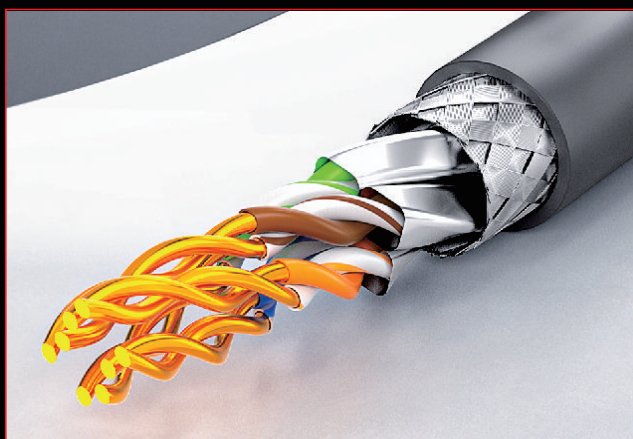

99.95% Oxygen-Free Copper with Aluminum Braid Shielding.




Enables stable high-speed data transmission between various devices.



IDC Data Center Provides Crosstalk Attenuation And Return Loss Data

Product Description

Cable Type	CAT6A	Shielding Type	S/FTP
Transmission Rate	10Gbps	Bandwidth	500MHz
Cable Outer Diameter	7.50±0.02mm	Max Installation Tensile Strength	≤110N
Operating Temperature	-20~75°C(-14~167°F)	Install Temperature	-10~50°C(-14~122°F)
RoHS Compliance	Compliant	Compliant Standards	YD/T1019-2023

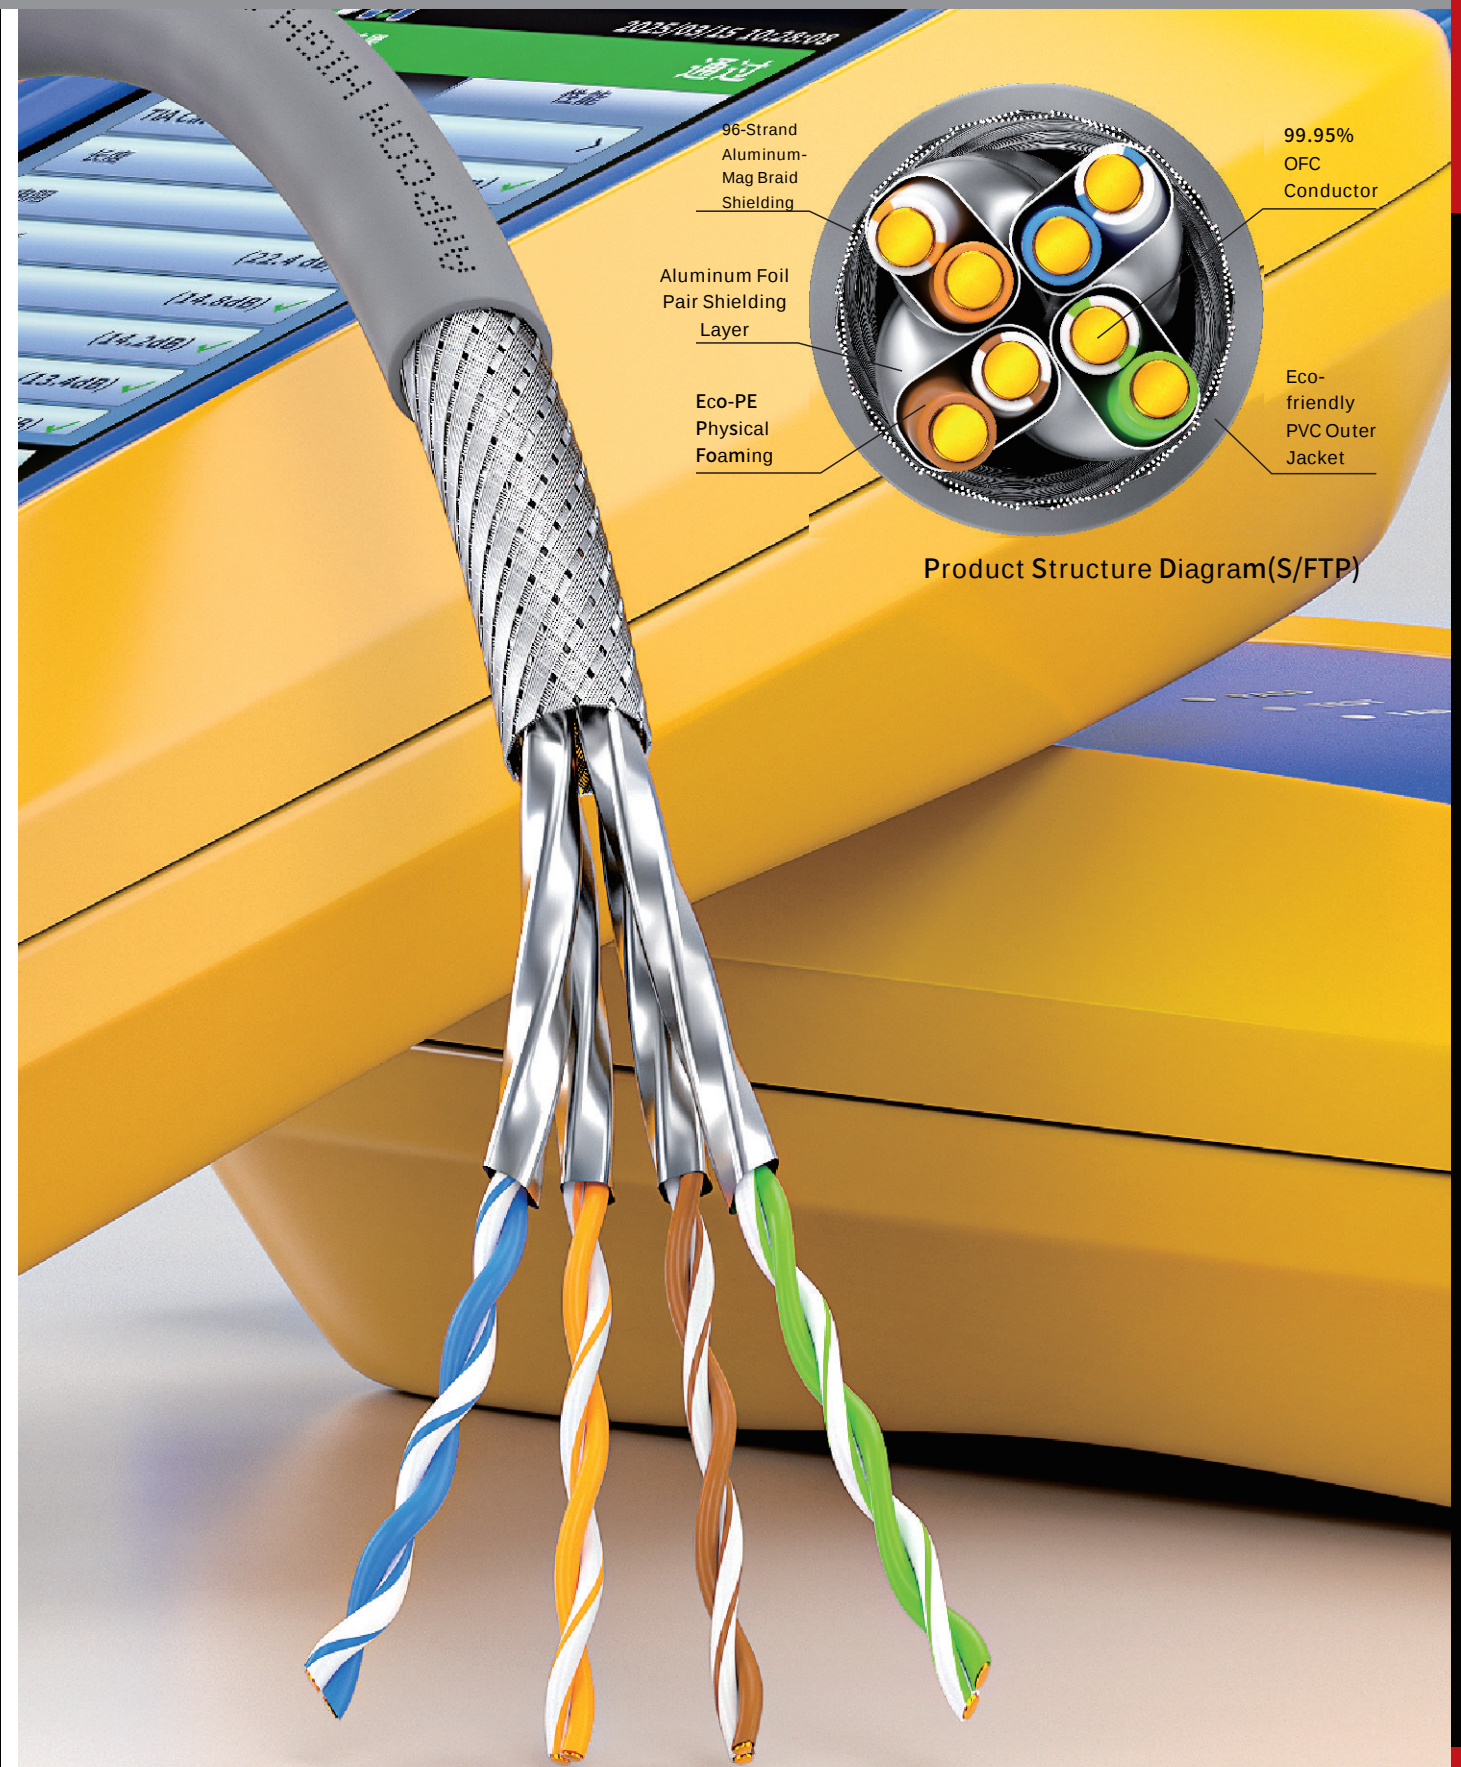

Product Structure Diagram(S/FTP)

Order Information

S/FTP Network Cable	Color	Barcode	Conductor	Conductor Diameter	Shielding Layer	Transmission Speed	Inner Jacket	Outer Jacket	Test Standard	Tester
Cat6a Dual Shielded	Gray	6935089126157	OFC ≥99.95%	0.58mm ± 0.01mm	Aluminum Foil Aluminum-Mag Braid	10Gbps	Eco-PE Physical Foaming	LSZH	90m Link	FLUKE-8000
	Red	6935089126294								

■ Cable Conductor Diameter Within Positive Tolerance; ■ Length 305M/Roll, Tolerance Range: ±30Cm; ■ For Other Materials, Specs, Weight, Contact Customer Service.

For more product information, please contact: service@ampcom.com