


战甲版低烟无卤S/FTP双屏蔽网络跳线

BATTLE ARMOR VERSION RJ45 LSZH S/FTP NETWORK PATCH CORDS



Custom-molded LSZH outer jacket with 50µm gold-plated RJ45 connectors.

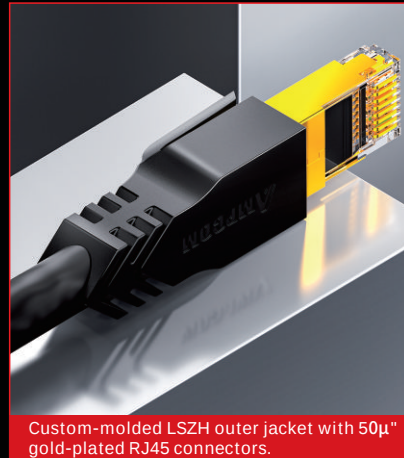

High-purity oxygen-free copper conductor tested via third-party FLUKE channel.



Double-shielded structure suitable for IDC data center high-speed data transmission.



Category 6a & 7 & 8 S/FTP – Black



Category 6a & 7 & 8 S/FTP – Blue



Category 6a & 7 & 8 S/FTP – Orange



Category 6a & 7 & 8 S/FTP – Gray



Category 6a S/FTP – Red

Product Description

Conductor	High-Purity Oxygen-Free Copper	Press-fit Boot	Single Shot Molding
Conductor Gauge	24AWG/7*0.20mm	Cable Jacket Material	LSZH
Crimping Method	568B	Conductor Insulation	Eco-Friendly PE
Gold-Plated Connector Thickness	50µm Gold-Plated Copper Shell	Shielding Layer 01	Four-Pair Twisted Pair With Foil Shielding
Outside Diameter	7.5±0.2mm	Shielding Layer 02	0.55µm Aluminum Foil Overall Shielding
Colors & Lengths	See Order Information Table	Shielding Layer 03	128-Strand Al-Mg Braid Shielding
Testing Standard	TIA Channnel	Testing Instrument	FLUKE-8000



Ordering Information

Armored Edition	Type	Length	Color	Code	Speed	Bandwidth	Conductor Diameter	RJ45	Jacket	Testing
LSZH CAT6A S/FTP	CAT6A S/FTP	2 meters	Black	6935089155836	10Gbps	500MHz	OF-Cu 7*0.2mm	50μ" Gold-Plated Copper Shell	LSZH	TIA Channel
			Grey	6935089156130						
			Blue	6935089156031						
			Red	6935089155935						
LSZH CAT7 S/FTP	CAT7 S/FTP		Black	6935089156239	10Gbps	600MHz				
			Grey	6935089156536						
			Blue	6935089156437						
			Orange	6935089156338						
LSZH CAT8 S/FTP	CAT8 S/FTP		Black	6935089141143	40Gbps	2000MHz				
			Grey	6935089162872						
			Blue	6935089162780						
			Orange	6935089162698						

■ Stock Availability : Cat6a & Cat7 0.5m-50m, Cat8 0.5-30m; (custom color & lengths supported); ■ Applicable Standard: ISO/IEC11801-2017

■ Both ends use gold-plated copper RJ45 connectors 50µm".