


RJ45免压接锌合金屏蔽网络水晶头
RJ45 STP PRESS-FREE ZINC ALLOY NETWORK CONNECTOR

Ordering Information

Tool-Free RJ45 Plug	Type	Barcode	Gold Plating	Shell Material	Housing Material	Supported Speed	Supported Bandwidth	Insertion and Extraction Life	Cable Fixation Method	Implementation Standard
Zinc Alloy Shielded	Cat6	6935089147886	50μ"	Zinc Alloy	Environmental friendly PC	1Gbps	250Mhz	≥750 times	Nut Fastening	IEC 60603-7
	Cat6a	6935089148364				10Gbps	500Mhz			
	Cat7	6935089148371				10Gbps	600Mhz			
	Cat7a	6935089148388				10Gbps	600Mhz			
	Cat8	6935089148395				40Gbps	2000Mhz			

Applicable cable: 22 - 24AWG; The tail adopts a nut - fastening structure design, which is convenient and fast for construction;

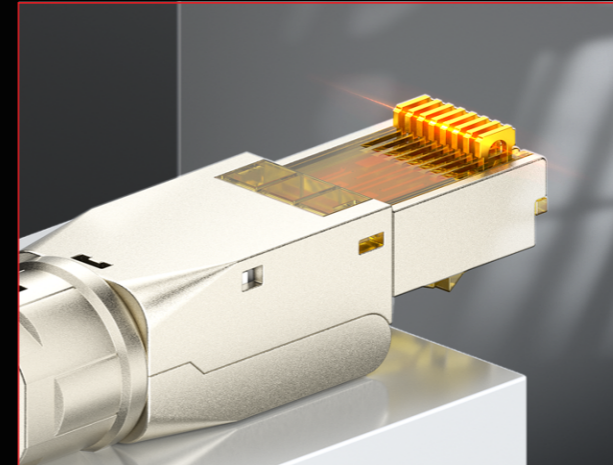

50 μ" Gold-plated Needle Piece Antioxidant And Plug Resistant




Exquisite Exclusive Vacuum Formed Packaging



Fully Enclosed Zinc Alloy Shielded Housing For Enhanced Interference Resistance



Built In Competitive Grade Customized High-speed Circuit Board

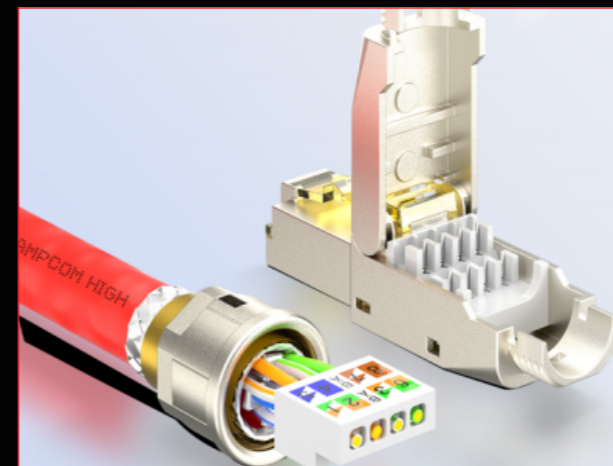

Tool Free Crimping Even Novices Can Easily Connect Wires



Through Various Tests Strict Quality Control Of Products

Product Description

Shell Material	Zinc Alloy	Wire Sequence Standard	TIA568A/568B
Inner Shell Material	Environmental - friendly PC	Passed Test	FLUKE
Needle Piece Process	Nickel Plating + Gold Plating	Test Standard	TIA CAT6A/CAT8 Channel
Crimping Times	≥20 times	Needle Piece Thickness	0.35±0.01mm
Insertion and Extraction Times	≥750 times	Needle Piece Width	3.5±0.05mm
RoHS Compliance	Complies with	Applicable Cable	22-24AWG

For more product information, please contact: service@ampcom.com